

S8000 日本語対応ファームウェアへのアップデート方法

1. Web ブラウザーからスイッチにログインします。



Nighthawk S8000

If logging in for the first time, log in with your switch's default password which is found on the label on the bottom of the switch.

Device Password


.....|

LOG IN


2. [ADVANCED SETTINGS] > [Firmware] の順に選択します。

A screenshot of the Netgear S8000 web management interface. The top navigation bar includes 'HOME', 'PRIORITIZATION', 'DIAGNOSTICS', and 'ADVANCED SETTINGS' (highlighted with a red box). The 'NETGEAR' logo is on the right. A left sidebar menu lists various settings, with 'Firmware' highlighted in blue and also marked with a red box. The main content area shows the 'FIRMWARE' section with the current version 'v1.0.2.3' and an option to 'UPDATE FIRMWARE'. Under 'UPDATE FIRMWARE', there is a text prompt 'Choose a file... <firmware.bin>' followed by a file selection icon (a blue folder) which is also highlighted with a red box. An 'UPLOAD' button is located below the file selection area.

3. フォルダのアイコンをクリックしてファームウェアを選択し、[開く] をクリックします。

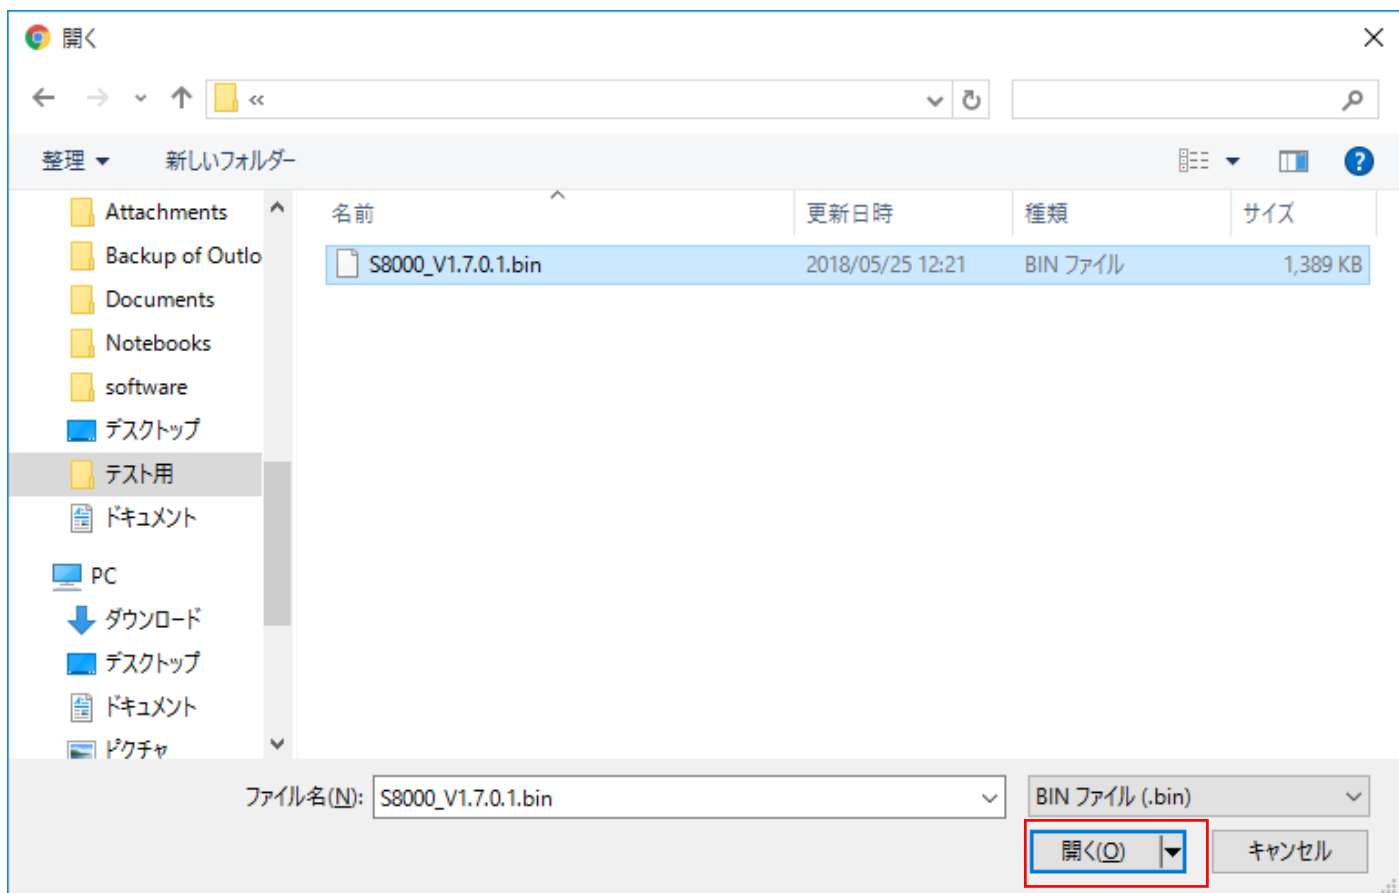

4. [UPLOAD] をクリックします。

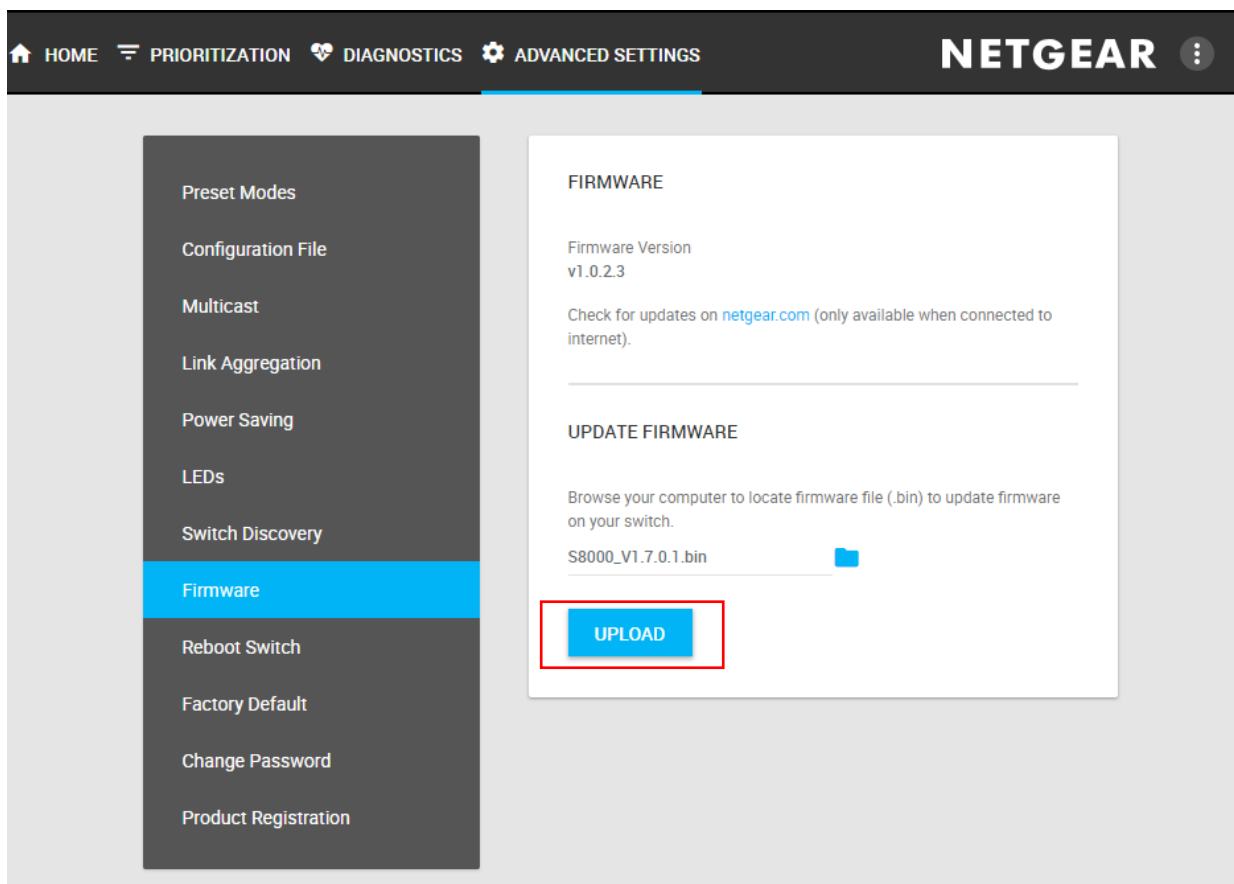

5. ファームウェアをアップデートしている間、以下のようなメッセージが表示されます。
アップデートが完了するまで LAN ケーブルを抜いたり、スイッチの電源を切ったりしないでください。

FIRMWARE UPGRADE

Warning: Do not interrupt the network connection or power to the switch during this process. Do not disconnect any Ethernet cables or power off the switch until the process is complete.



6. しばらくすると日本語のログイン画面が表示されます。これでアップデート完了です。



Nighthawk S8000

初めてログインするときは、スイッチの初期設定のパスワードでログインしてください。このパスワードは、スイッチ下部のラベルに記載されています。

デバイスのパスワード

ログイン